

HPPB Series Press Brake Machine

- ◆ CE certification
- ◆ All steel welded construction
- ◆ Side safety guards
- ◆ Rear safety guards (interlock switches or photoelectric)
- ◆ Adjustable cams to set the upper position & work speed change point



Hydraulic Valves



Ball Screw & Linear Guide



Quick Clamp



New Quick Clamp



Light Curtain



Adjustable Cams

Code	Model	Nominal Force (KN)	Length of Worktable (mm)	Distance between Columns (mm)	Throat Depth (mm)	Ram Stroke (mm)	Max Opening Height (mm)	Stroke Travel (mm)	Main Motor Power (KW)	Net Weight (kg)	Dimension (L×W×H) (mm)
10401	HPPB-30/1320	300	1320	1000	200	90	200	60	4	1550	1650×1150×1900
10402	HPPB-40/2000	400	2000	1800	200	100	340	80	4	3500	2550×1500×2200
10403	HPPB-40/2500	400	2500	2300	200	100	340	80	4	3850	3100×1500×2200
10404	HPPB-63/2500	630	2500	2260	250	100	355	80	5.5	4800	3100×1600×2280
10405	HPPB-63/3200	630	3200	2960	250	100	355	80	5.5	5800	3800×1650×2280
10406	HPPB-80/2500	800	2500	2240	250	100	355	80	7.5	6000	3100×1650×2300
10407	HPPB-80/3200	800	3200	2940	250	100	355	80	7.5	6500	3900×1700×2300
10408	HPPB-80/4000	800	4000	3740	250	100	355	80	7.5	7800	4700×1600×2300
10409	HPPB-100/2500	1000	2500	2200	320	120	415	100	7.5	7500	3200×1700×2560
10410	HPPB-100/3200	1000	3200	2900	320	120	415	100	7.5	8100	3900×1800×2560
10411	HPPB-100/4000	1000	4000	3700	320	120	415	100	7.5	10000	4700×1900×2560
10412	HPPB-125/2500	1250	2500	2200	320	120	415	100	7.5	7800	3150×1850×2530
10413	HPPB-125/3200	1250	3200	2900	320	120	415	100	7.5	8500	3900×1800×2560
10414	HPPB-125/4000	1250	4000	3700	320	120	415	100	7.5	10800	4700×1900×2560
10415	HPPB-160/3200	1600	3200	2840	320	200	455	160	11	11800	3900×1800×2580
10416	HPPB-160/4000	1600	4000	3640	320	200	455	160	11	13500	4700×2200×2600
10417	HPPB-160/6000	1600	6000	5640	320	200	455	160	15	19500	6700×2300×2800
10418	HPPB-200/3200	2000	3200	2800	320	200	455	160	15	14500	3900×2200×3000
10419	HPPB-200/4000	2000	4000	3600	320	200	455	160	15	15400	4800×2280×3000
10420	HPPB-200/6000	2000	6000	5600	320	200	455	160	15	24600	6800×2280×3000
10421	HPPB-250/3200	2500	3200	2770	400	250	560	200	18.5	16000	3900×2280×3000
10422	HPPB-250/4000	2500	4000	3570	400	250	560	200	18.5	18800	4400×2280×3000
10423	HPPB-250/6000	2500	6000	5570	400	250	560	200	22	34000	6900×2280×3800
10424	HPPB-300/3200	3000	3200	2720	400	250	560	200	22	21000	3800×2300×3200
10425	HPPB-300/4000	3000	4000	3520	400	250	560	200	22	23000	4600×2300×3200
10426	HPPB-300/6000	3000	6000	5520	400	250	560	200	30	32000	6800×2600×3800

HPBF Panbrakes/Folding Machine


- ◆ CE certification
- ◆ Hydraulically operated bending and clamping beam for efficient heavy duty operation
- ◆ Section claspers suitable for producing disk, box etc.
- ◆ CNC control for bending angle and back gauge (double axis)
- ◆ Servo motor drives scotch to position back gauge precisely and rapidly



Hydraulic Type with Manual Back Gauge



CNC Type with Motorized Back Gauge

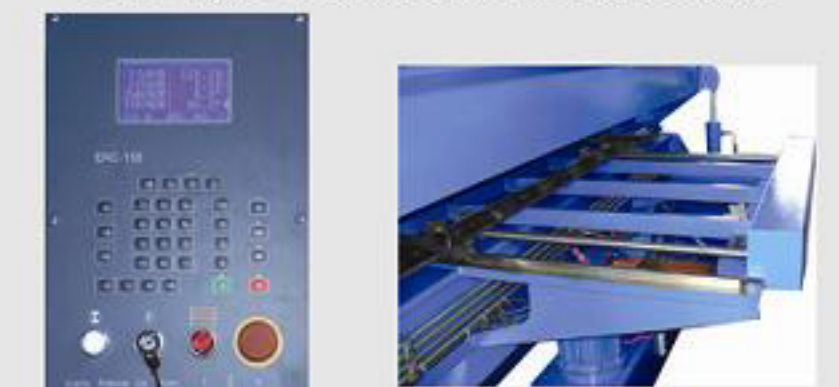

Code	Model	Folding Length (mm)	Folding Angle (°)	Max open Height (mm)	Main Motor(KW)	Net Weight(kg)	Dimension (L×W×H) (mm)
10430	HPBF-2×2500	2500	0-120	110	2.2	1700	3300×850×1550
10431	HPBF-3×2000	2000	0-120	110	2.2	2500	2900×1130×1700
10432	HPBF-3×2500	2500	0-120	110	4	3100	3450×1130×1800
10433	HPBF-3×3200	3200	0-120	110	4	3800	4150×1130×1800
10434	HPBF-3×4000	4000	0-120	110	4	6100	4900×1150×1900
10435	HPBF-4×1320	1320	0-120	110	4	1800	2270×1130×1800
10436	HPBF-4×2000	2000	0-120	110	4	2500	2900×1130×1700
10437	HPBF-5×2500	2500	0-120	110	5.5	4000	3500×1130×1800
10438	HPBF-5×3200	3200	0-120	110	5.5	5500	4150×1130×1900