

Flat bed units

FB₂


Flat bed unit with Z-axis



Flat bed unit with Z-axis and underframe



Flat bed unit with Z-axis, underframe and housing

General note

Flatbed units as defined in the machine guidelines as incomplete machines according to the modular system with processing paths of 250 to 1250 mm. Step motors (MS200HT), set for no-play, are used as spindle drives. Recirculating ball drives with a repeatability of ± 0.02 mm (positioning reproducibility) are used. The linear guides used are the isel double track feeds, proven over many years, with no-play pre-stressed linear ball bearings and recirculating ball spindles with a repeatability of ± 0.02 mm. All units are equipped with two limit switches per spindle. The machining and positioning units are available in a number of versions and are characterised by smooth running and high process speeds. The use of high quality aluminium components with flat-milled surfaces achieves low weight and high accuracy. isel X/Y/Z units are the ideal basis for setting up machines and systems for fitting and assembling, pressing and engraving, drilling and milling, milling and screwing, shaping and modelling, bonding and casting, soldering and welding, measuring and checking, sawing and cutting, etc.

Ordering information

X/Y flatbed units FB2

Part no.	Chassis A x B (mm)	Clamping surface X x Y (mm)	process travel X x Y (mm)	Z gap (mm)
246203M	1,210 x 946	750 x 850	530 x 500	190
246203 2040M	1,210 x 1,196	750 x 1,100	530 x 750	
246203 2054M	1,210 x 1,446	750 x 1,350	530 x 1,000	
246203 2067M	1,460 x 1,446	1,000 x 1,350	780 x 850	
246203 2130M	1,710 x 1,846	1,250 x 1,750	1,030 x 1250	

All flatbed units are fitted with **16 x 4 mm recirculating ball** drives as standard.
Side protection covers included in smallest version (530 x 500 mm).

Z-axes for flatbed units

Part no.	Lift (mm)	
230514M	75	with magnet brake 24 V
230514 0400M	160	with magnet brake 24 V

Underframes

Part no.	suitable for flatbed unit With clamping surface:
248500 0027	750 x 850
248500 0040	750 x 1,100
248500 0054	750 x 1,350
248500 0067	1,000 x 1,350
248500 0130	1,250 x 1,750

Housings

Part no.	suitable for flatbed units with clamping surface:
248200 0000	750 x 850
248200 2040	750 x 1,100
248200 2054	750 x 1,350
248200 2067	1,000 x 1,350
248200 2130	1,250 x 1,750

Flat bed units



Options

- appropriate Controller (e.g.: iMC-S8)
- software modules for operating in CAM, CNC and SPS applications
- underframe
- housing
- spindle motors (see pages E-24 et seq.)
- gap: 300 and 500 mm respectively




Accessories

Part no.	
219200 0001	Energy guidance chain
645201 0073	Set of side protection covers, L 1050 mm
645201 00731	Set of side protection covers, L 1300 mm
645201 00732	Set of side protection covers, L 1700 mm

Software

Part-no.	
Z11 - 333 500	ProNC Software
Z13 - 337 070	isy-CAM 2.8

Dimensioned drawings

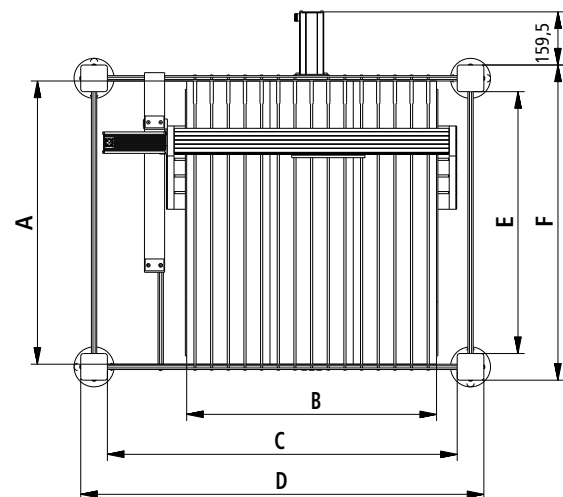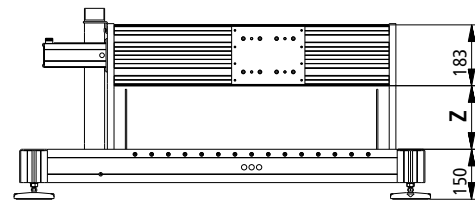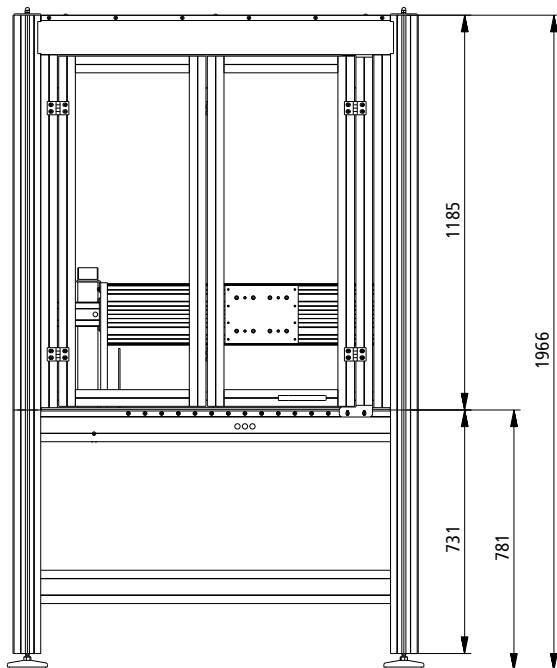

Part no.	Travel [mm]		Bench clamping area						
	X	Y	A	B	C	D	E	F	Z
246203M	530	500	850	750	1,050	1,210	786	946	190
246203 2040M	530	750	1,100	750	1,050	1,210	1,036	1,196	
246203 2054M	530	1,000	1,350	750	1,050	1,210	1,286	1,446	
246203 2067M	780	850	1,350	1,000	1,300	1,460	1,286	1,446	
246203 2130M	1,030	1,250	1,750	1,250	1,550	1,710	1,686	1,846	

Technical specifications subject to change.