


ASM 18 | ASM 60

Centrifugal plant

The ASM centrifugal machines are ideal for small parts. With higher processing intensity, they deburr 10-20 times faster than vibratory finishing machines. The centrifugal system can be planned as a stand-alone unit up to a fully automatic system.




ASM 18

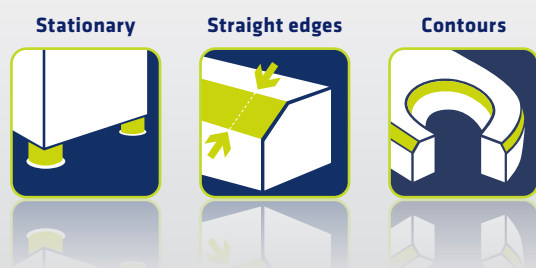


Accessories on request

ASM 18

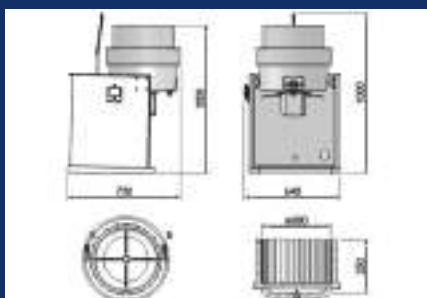

ASM 60

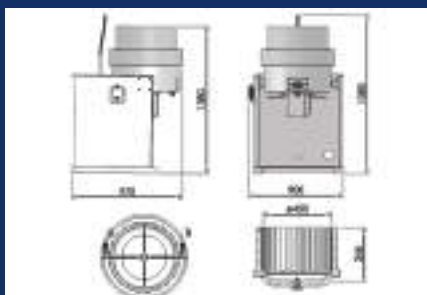

Features

- Sturdy, long-life construction with plastic-coated steel tub
- Easy emptying through tiltable working tank
- Compact device including base frame and manual separation (ASM 18)

Options

- Grinding and polishing media for individual application
- Additive (compounds)
- Separator
- Various opportunities for water treatment (e.g. paper filter)

Delivery contents

- Timer
- Dosing pump
- Manual sorting sieve (ASM 18)
- Controller
- Operating manual

Technical data

	ASM 18	ASM 60
Motor	0,75 kW 1,500 rpm	2,2 kW 1,500 rpm
Energy	380 V, 50-60 Hz	380V / 50-60 Hz
Dimensions of work tank	Ø 280 x 250 mm	Ø 450 x 346 mm
Dimensions	720 x 640 x 1000 mm	970 x 900 x 1380 mm
Weight	120 kg	380 kg
Item no.	67883	67882