
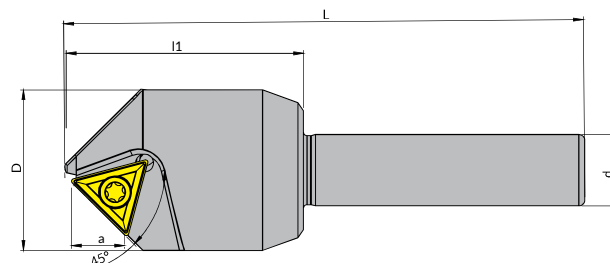


內孔倒角範圍 Chamfer Range Ø4.5 - Ø21

KOVIT

NEW

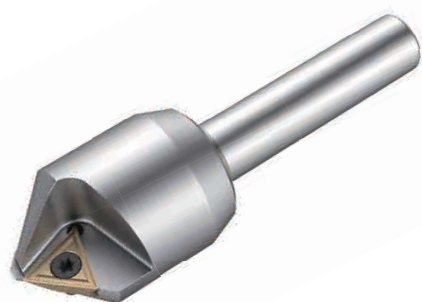

特點 Feature

- 適用機台：鑽床、CNC 銑床、旋臂鑽床、傳統銑床、電 (氣) 動工具
- 適用夾持柄徑 Ø12
- 刀片可提供出色的倒角表面
- Suitable Machines: Drilling Machine, CNC Milling Machine, Conventional Milling Machine, and Electric/Pneumatic Tool
- Shank diameter Ø12.
- Excellent chamfering surface.

規格 Spec.	L	l1	D	d	d1	a	內孔倒角範圍 Inner Chamfer Range	功能 Features	刀片 Insert	重量 (KGS) Weight
MDC-2212-85L-TC13	85	38	22	12	27	8	Ø4.5 - Ø21	倒角 Chamfering	TC..13T3..-CR	0.36


規格 Spec.	內容物 Contents			
	刀具 Tool	刀片 Insert	螺絲 Screw	扳手 Wrench
MDC-2212-85L-TC13-SET	MDC-2212-85L-TC13	TC..13T3..-CR RM535(2pcs)	M3.5-6.2-5.0-60 M4-8.0-5.0-43	T15

配件表 Accessories

圖示 Fig.					
名稱 Name	刀片 Insert	支撐導塊 Support Guide Pad	螺絲 Screw	螺絲 Screw	扳手 Wrench
規格 Spec.	TC..13T3..-CR	MDC-SGP	M3.5-6.2-5.0-60	M4-8.0-5.0-43	T15
功能 Function	切削 Cutting	引導加工 Guide The Cutter	鎖固刀片 Lock Insret	鎖固支撐導塊 Lock Support Guide Pad	鎖固螺絲 Fasten Screws

下孔徑 Hole Diameter Size	轉速 n(rpm)			
	鋼 Steel	不鏽鋼 Stainless Steel	鑄鐵 Cast Iron	鋁合金 Aluminum Alloy
Ø4.5	600	550	850	1150
Ø12	450	350	550	750
Ø16	350	250	450	550
Ø18	250	250	450	450

範例 Example

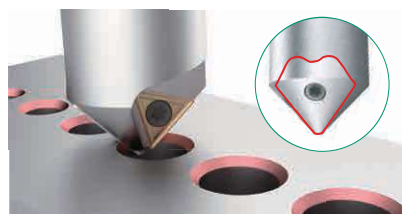

- 支撐導塊消除了顫動，易於操作
- Support guide pad eliminates chatter, enables easy operation.

• 長度單位 Unit of Length (mm)

[illegible]

- MR 鈦合金專用 MR: Applicable to Titanium - CR 鑽床倒角刀專用 CR: Applicable to Deburring And Chamfering Cutter

★ 推薦 Recommended NEW 新品 New Product

-TC..10/TC..13 . 02R 角刀片為「倒角功能」專用

-TC..16, 04 刀片為「倒角功能」專用

- TC..10/TC..13 → 02 radius can only use for chamfering.

- TC..16 → 04 radius can only use for chamfering.

- 規格末編碼帶 FR 刀片為銳角刀片 Suffix FR model designates a sharp cutting edge.insert.

• 長度單位 Unit of Length (mm)