




Angle Plate Plane

Double Sided Clamping Column - T - slot

- Material : Cast Iron GG 30 (DIN)
- Heat treated (Normalized)
- Features : • Can be special order with any size
 - MTP hole
- Application: Horizontal machining center

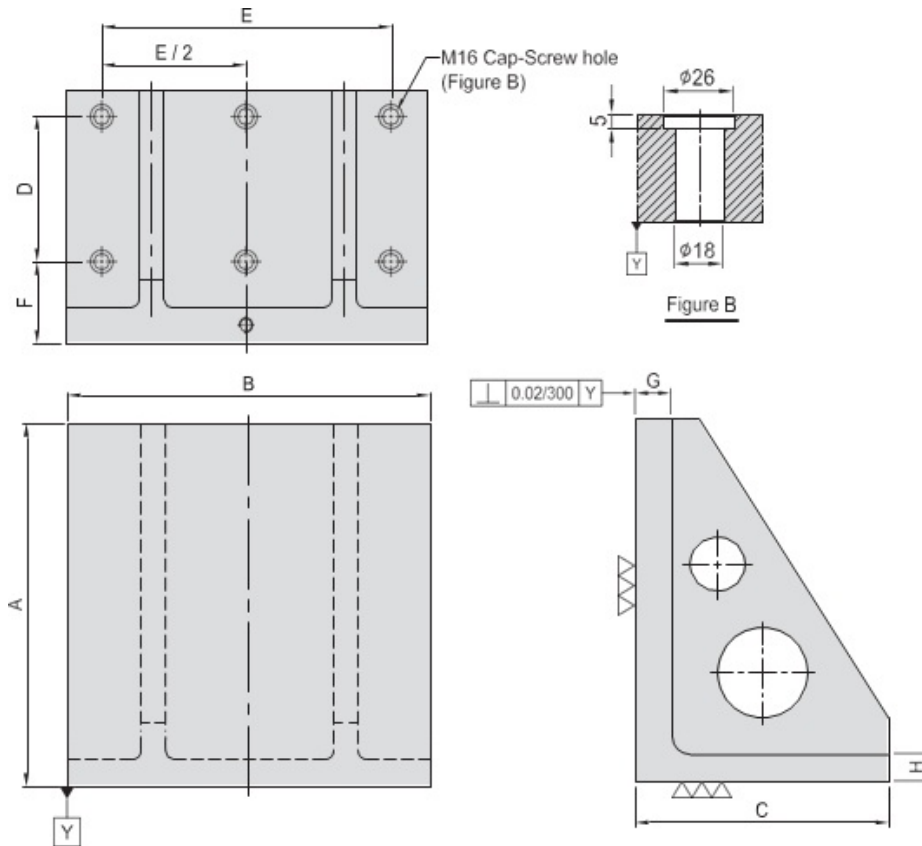

MODEL	A	B	C	D	E	F	G	H	MOUNTING HOLES	Kg
APP/SQ/400400	400	400	280	160	320	90	40	30	6	90
APP/SQ/500500	500	500	340	200	400	90	50	35	6	165
APP/SQ/630630	630	630	435	250	500	100		40		275
APP/SQ/800800	800	800	525	320	640	115	50	45	6	475




Angle Plate T-Slot

Angle Plate



- Material : Cast Iron GG 30 (DIN)
- Heat treated (Normalized)
- Features :
 - T-slots available in M14 & M14
 - T-slots running horizontally
 - Key-way running vertically
 - Easily adapts to standardized jig components.

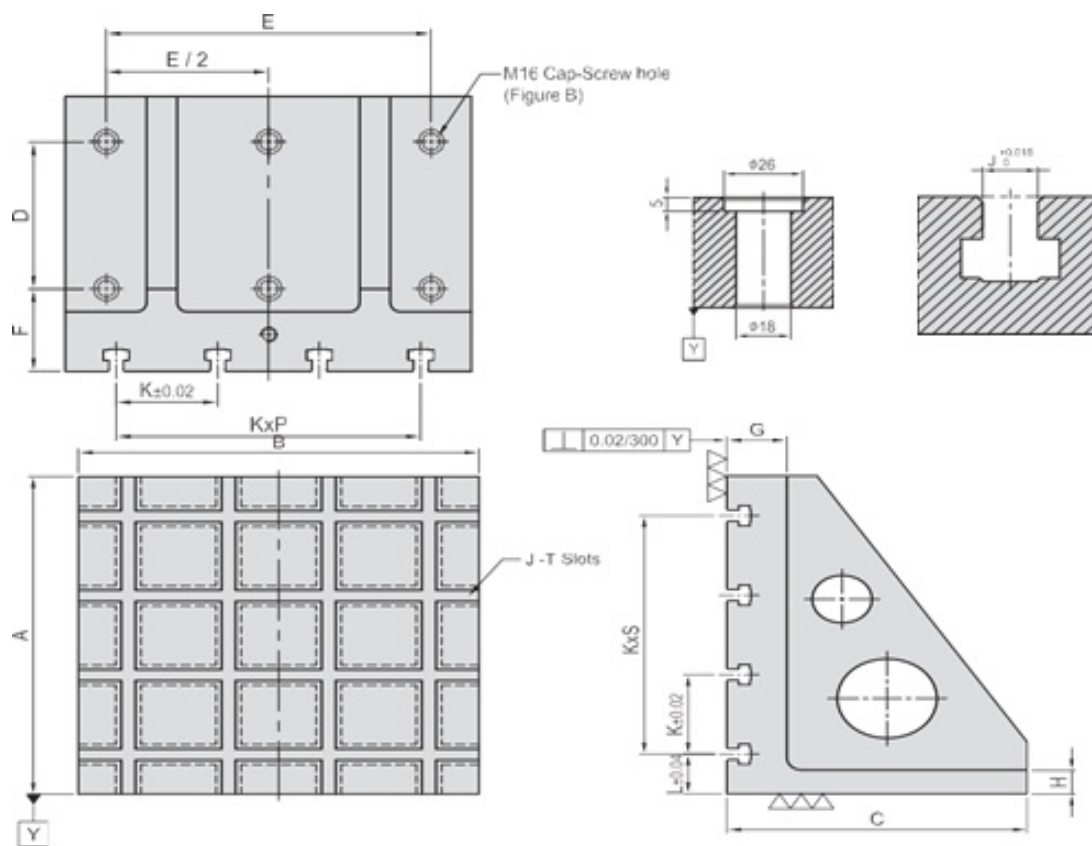


MODEL	A	B	C	D	E	F	G	H	J	K	L	P	S	MOUNTING HOLES	Kg
APT/SQ/400400-14	400	400	300	160	320	90	60	30	14	100	50	3	3	6	101
APT/SQ/500500-14	500	500	350	200	400	90	66	35	14	100	50	4	4	6	170
APT/SQ/630630-14	630	630	450	250	500	100	65	40		125	65	4	4		295
APT/SQ/800800-14	800	800	550	320	640	115	75	45	14	150	100	4	4	6	566
APT/SQ/400400-18	400	400	300	160	320	90	60	30	18	100	50	3	3	6	96
APT/SQ/500500-18	500	500	350	200	400	90	60	35	18	100	50	4	4	6	162
APT/SQ/630630-18	630	630	450	250	500	100	65	40		125	65	4	4		285
APT/SQ/800800-18	800	800	550	320	640	115	75	45	18	150	100	4	4	6	55




Angle Plate Grid Hole

Angle Plate

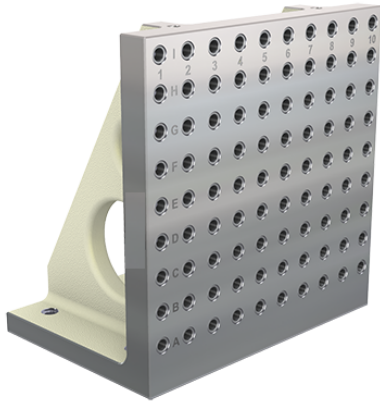

- Material : Cast Iron GG 30 (DIN)
- Heat treated (Normalized)
- Features :
 - Alignment bushing
 - Threaded insert
 - MTP hole spacing: 50 ± 0.02
 - Grid holes available in M12 & M16
 - Easily adapts to standardized jig component
- Application : Horizontal machining centre

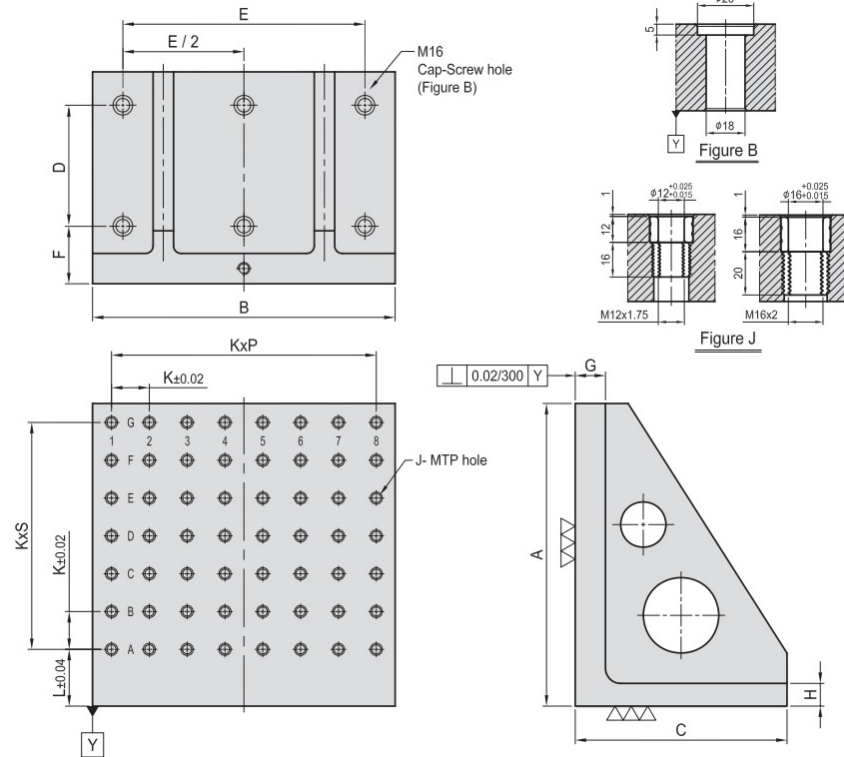

MODEL	A	B	C	D	E	F	G	H	J		K	L	P	S	MTP	MOUNTING HOLES	Kg
APG/SQ/400400-12	400	400	280	160	320	90	40	30	∅ 12	M12	50	75	7	6	56	6	87
APG/SQ/500500-12	500	500	340	200	400	90	50	35	∅ 12	M12	50	75	9	8	90	6	173
APG/SQ/630630-12	630	630	435	250	500	100		40				40	11	11	144		300
APG/SQ/800800-12	800	800	525	320	640	115	50	45	∅ 12	M12	50	75	15	14	240	6	477
APG/SQ/400400-16	400	400	280	160	320	90	40	30	∅ 16	M16	50	75	7	6	56	6	85
APG/SQ/500500-16	500	500	340	200	400	90	50	35	∅ 16	M16	50	75	9	9	90	6	170
APG/SQ/630630-16	630	630	435	250	500	100		40				40	11	11	144		295
APG/SQ/800800-16	800	800	525	320	640	115	50	45	∅ 16	M16	50	75	15	14	240	6	470