



MOLETEADORES POR CORTE CUT-KNURLING TOOLS



MFS 89



(Fig. 1)

+ Características



- Recomendado para moleteados tipo RAA
- Cabeza basculante para el alineamiento de la moleta (Fig. 1)
- Eje de HSS
- Ajuste del ángulo de ataque mediante tornillos integrados en el mango

+ Features

- Recommended for RAA type knurling
- Pivoting head for knurl alignment (Fig. 1)
- HSS bushing
- Adjustment of tool clearance angle by threaded studs integrated in the shank



+ Avance Feed

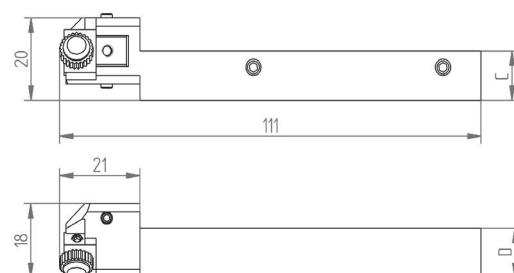

+ Formas de moleteados realizables Feasible knurling forms

	^R RAA	RBR 30°	^R RAA	RBL 30°
Tipo de moleteado Knurling form				
Con moleta tipo With knurl type	BR30°	AA	BL30°	AA
Con herramienta With tool	Versión derecha R Right - handed R		Versión izquierda L Left - handed L	
Avances permitidos Allowed feeds	F	F	F	F

^R Moleteados recomendados | Recommended knurling

Herramienta Tool							
Código Code	Referencia Reference	Versión Version	Capacidad Capacity	Moleta Knurl	C	D	Kg
01090900	MFS 89.25.08 R	R	Ø 1.5 ÷ 12	8.9x2.5x4	8	8	0.2
01091000	MFS 89.25.08 L	L	Ø 1.5 ÷ 12	8.9x2.5x4	8	8	0.2
01091100	MFS 89.25.10 R	R	Ø 1.5 ÷ 12	8.9x2.5x4	10	10	0.2
01091200	MFS 89.25.10 L	L	Ø 1.5 ÷ 12	8.9x2.5x4	10	10	0.2
01091300	MFS 89.25.12 R	R	Ø 1.5 ÷ 12	8.9x2.5x4	12	12	0.2
01091400	MFS 89.25.12 L	L	Ø 1.5 ÷ 12	8.9x2.5x4	12	12	0.2

Repuesto Spare Part		
Código Code	Referencia Reference	
01993301	ES 89.25 HM	