



MOLETEADORES POR CORTE CUT-KNURLING TOOLS



MFS1 14



Características

- Recomendado para moleteados tipo RAA
- Cabeza basculante para el alineamiento de la moleta (Fig. 1)
- Eje de HSS+TIN
- Ajuste del ángulo de ataque mediante tornillos integrados en el mango



Features



- Recommended for RAA type knurling
- Pivoting head for knurl alignment (Fig. 1)
- HSS+TIN bushing
- Adjustment of tool clearance angle by threaded studs integrated in the shank



(Fig. 1)



Avance Feed

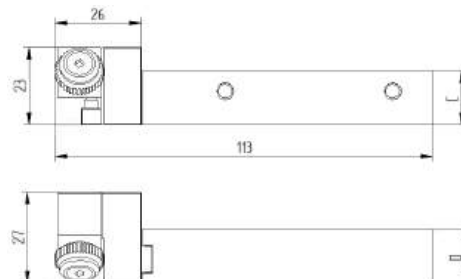

Formas de moleteados realizables Feasible knurling forms

	R RAA	RBR 30°	R RAA	RBL 30°
Tipo de moleteado Knurling form				
Con moleta tipo With knurl type	BR30°	AA	BL30°	AA
Con herramienta With tool	Versión derecha R Right - handed R		Versión izquierda L Left - handed L	
Avances permitidos Allowed feeds	F	F	F	F

R Moleteados recomendados | Recommended knurling

Herramienta Tool							
Código Code	Referencia Reference	Versión Version	Capacidad Capacity	Moleta Knurl	C	D	Kg
01260100	MFS1 14.53.12 R	R	Ø 3 ÷ 50	14.5x3x5	12	14	0.3
01260200	MFS1 14.53.12 L	L	Ø 3 ÷ 50	14.5x3x5	12	14	0.3
01260300	MFS1 14.53.14 R	R	Ø 3 ÷ 50	14.5x3x5	14	14	0.3
01260400	MFS1 14.53.14 L	L	Ø 3 ÷ 50	14.5x3x5	14	14	0.3
01260500	MFS1 14.53.16 R	R	Ø 3 ÷ 50	14.5x3x5	16	16	0.3
01260600	MFS1 14.53.16 L	L	Ø 3 ÷ 50	14.5x3x5	16	16	0.3

Repuesto Spare Part		
Código Code	Referencia Reference	
01985600	EAT 14.53	